

Product datasheet

Specifications



power supply module Modicon Quantum - 24 V DC 20..30 V - redundant

140CPS22400

⚠ Discontinued - Service only

⚠ Discontinued on: 31 Dec 2022

⚠ To be end-of-service on: 31 Dec 2030

Main

Range Of Product	Modicon Quantum automation platform
Product Or Component Type	Power supply module
Power Supply Type	Redundant

Complementary

Input Voltage	24 V (20...30 V) DC
Input Current	3800 mA
Inrush Current	14 A 20 V 25 A 24 V
Maximum Input Power Interruption	100 ms 1 ms 20 V
Associated Fuse Rating	5 A, slow-blow
Output Voltage	5.1 V DC
Power Supply Output Current	8 A redundant
Output Overvoltage Protection	Internal
Output Overload Protection	2.3 x maximum rated input voltage for 1.3 ms
Power Dissipation	6 + (1.8 x Iout) where Iout is in A
Alarm Output	1 NC 6 A 220 V power supply fault
Local Signalling	1 LED (green) for power (PWR OK)
Marking	CE
Module Format	Standard
Net Weight	0.65 kg

Environment

Standards	UL 508 CSA C22.2 No 142
Product Certifications	FM Class 1 Division 2 cUL
Resistance To Electrostatic Discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2
Resistance To Electromagnetic Fields	10 V/m 80...2000 MHz conforming to IEC 801-3
Ambient Air Temperature For Operation	0...60 °C

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Ambient Air Temperature For Storage	-40...85 °C
Relative Humidity	95 % without condensation
Operating Altitude	<= 5000 m

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	16.3 cm
Package 1 Width	4.5 cm
Package 1 Length	31.2 cm
Package 1 Weight	840.0 g
Unit Type Of Package 2	S03
Number Of Units In Package 2	7
Package 2 Height	30.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	6.38 kg

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)

Well-being performance



Mercury Free



Rohs Exemption Information

Yes

Eu Rohs Directive

Pro-active compliance (Product out of EU RoHS legal scope)

[EU RoHS Declaration](#)

China Rohs Regulation

[China RoHS declaration](#)

Weee

The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Circularity Profile

[End of Life Information](#)

Dimensions Drawings

Racks for Modules Mounting

Dimensions of Modules and Racks




- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

Connections and Schema

24 Vdc/8 A Redundant Power Supply Module

Wiring Diagram and Hold-up Capacitor Timing Chart

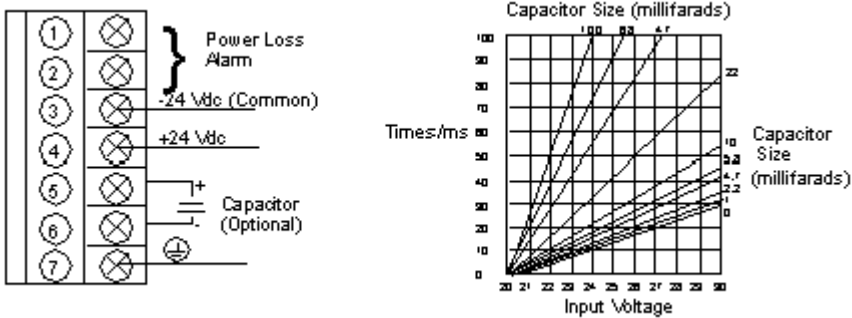

NOTE: A normally closed relay contact rated at 220 Vac, 6A / 30 Vdc, 5A is available on terminals 1 and 2 of the power terminal strip. This contact set may be used to signal input power OFF, or a power supply failure. The relay will de-energize when input power drops below 8 Vdc.