Product datasheet

Specifications





logic controller, Modicon M251, 2x Ethernet

TM251MESE

Main

Range Of Product	Modicon M251	
Product Or Component Type	Logic controller	
[Us] Rated Supply Voltage	24 V DC	

Complementary

Complementary	
Maximum Number Of I/O Expansion Module	7 (local I/O-Architecture) 14 (remote I/O-Architecture)
Supply Voltage Limits	20.428.8 V
Inrush Current	50 A
Power Consumption In W	32.640.4 W (with max number of I/O expansion module)
Memory Capacity	64 MB for system memory RAM
Data Backed Up	128 MB built-in flash memory for backup of user programs
Data Storage Equipment	<= 16 GB SD card (optional)
Battery Type	BR2032 lithium non-rechargeable, battery life: 4 year(s)
Backup Time	2 years at 25 °C
Execution Time For 1 Kinstruction	0.3 ms for event and periodic task 0.7 ms for other instruction
Application Structure	4 cyclic master tasks 8 event tasks 3 cyclic master tasks + 1 freewheeling task 8 external event tasks
Realtime Clock	With
Clock Drift	<= 60 s/month at 25 °C
Integrated Connection Type	USB port with mini B USB 2.0 connector Non isolated serial link serial with RJ45 connector and RS232/RS485 interface Dual-port Ethernet 1 with RJ45 connector Ethernet port Ethernet 2 with RJ45 connector
Supply	(serial)serial link supply: 5 V, <200 mA
Transmission Rate	1.2115.2 kbit/s (115.2 kbit/s by default) for bus length of 15 m for RS485 1.2115.2 kbit/s (115.2 kbit/s by default) for bus length of 3 m for RS232 480 Mbit/s for bus length of 3 m for USB
Communication Port Protocol	USB port: USB - SoMachine-Network Non isolated serial link: Modbus master/slave - RTU/ASCII or SoMachine-Network
Port Ethernet	Ethernet 1 marking 10BASE-T/100BASE-TX - 2 copper cable Ethernet 2 marking 10BASE-T/100BASE-TX - 1 copper cable
Web Services	Web server

Communication Service	Downloading
	IEC VAR ACCESS
	Modbus TCP client
	Modbus TCP server Modbus TCP slave device
	Monitoring
	NGVL
	Programming
	Updating firmware
	SMS notifications
	DHCP client (Eth1)
	DHCP server (Eth2)
	Ethernet/IP originator (Eth2)
	Ethernet/IP target (Eth1, Eth2)
	Ethernet/IP scanner (Eth2)
	Modbus TCP I/O Scanner and Messaging (Eth2)
	FDR FTP client/server
	SNMP client/server
	SQL client
	Send and receive email from the controller based on TCP/UDP library
	Web server (WebVisu & XWeb system)
	OPC UA server
	DNS client
Maximum Number Of	8 Modbus server
Connections	8 Modbus client
	16 Ethernet/IP target
	4 FTP server
	10 web server
	8 SoMachine protocol
Number Of Server Device(S)	16 EtherNet/IP:
	64 Modbus TCP:
Cycle Time	10 ms 16 EtherNet/IP
•	64 ms 64 Modbus TCP
Local Signalling	1 LED (green) for PWR
	1 LED (green) for RUN
	1 LED (red) for module error (ERR)
	1 LED (red) for I/O error (I/O)
	1 LED (green) for SD card access (SD)
	1 LED (red) for BAT
	1 LED (green) for SL
	1 LED (red) for bus fault on TM4 (TM4)
	1 LED (green) for Ethernet activity (ETH1)
	1 LED (green) for Ethernet activity (ETH2)
Electrical Connection	removable screw terminal blockpower supply (pitch 5.08 mm)
Insulation	Non-insulated between supply and internal logic
	Between supply and ground at 500 V AC
Marking	CE
Surge Withstand	1 kV shielded cable common mode conforming to IEC 61000-4-5
	1 kV power lines common mode conforming to IEC 61000-4-5
	0.5 kV power lines differential mode conforming to IEC 61000-4-5
Mounting Support	Top hat type TH35-15 rail conforming to IEC 60715
	Top hat type TH35-7.5 rail conforming to IEC 60715
	plate or panel with fixing kit
Height	90 mm
Depth	95 mm
Width	54 mm
Net Weight	0.22 kg

Environment

Standards	ANSI/ISA 12-12-01 CSA C22.2 No 142
	CSA C22.2 No 142 CSA C22.2 No 213
	IEC 61131-2:2007
	Marine specification (LR, ABS, DNV, GL)
	UL 508
Product Certifications	cULus
	CE
	UKCA DNV-GL
	ABS
	LR
Resistance To Electrostatic	8 kV in air conforming to IEC 61000-4-2
Discharge	4 kV on contact conforming to IEC 61000-4-2
Resistance To Electromagnetic	10 V/m 80 MHz1 GHz conforming to IEC 61000-4-3
Fields	3 V/m 1.4 GHz2 GHz conforming to IEC 61000-4-3
	1 V/m 2 GHz3 GHz conforming to IEC 61000-4-3
Resistance To Fast Transients	2 kV (power lines) conforming to IEC 61000-4-4
	1 kV (Ethernet line) conforming to IEC 61000-4-4
	1 kV (serial link) conforming to IEC 61000-4-4
Resistance To Conducted	10 V 0.1580 MHz conforming to IEC 61000-4-6
Disturbances	3 V 0.180 MHz conforming to Marine specification (LR, ABS, DNV, GL)
	10 V spot frequency (2, 3, 4, 6.2, 8.2, 12.6, 16.5, 18.8, 22, 25 MHz) conforming to
	Marine specification (LR, ABS, DNV, GL)
Electromagnetic Emission	Conducted emissions - test level: 12069 dBµV/m QP (power lines) at 10150 kHz
	conforming to IEC 55011
	Conducted emissions - test level: 63 dBµV/m QP (power lines) at 1.530 MHz
	conforming to IEC 55011 Radiated emissions - test level: 40 dBμV/m QP class A (10 m) at 30230 MHz
	conforming to IEC 55011
	Conducted emissions - test level: 7963 dBµV/m QP (power lines) at 1501500
	kHz conforming to IEC 55011
	Radiated emissions - test level: 47 dB μ V/m QP class A (10 m) at 2301000 MHz
	conforming to IEC 55011
Immunity To Microbreaks	10 ms
Ambient Air Temperature For	-1035 °C (vertical installation)
Operation	-1055 °C (horizontal installation)
Ambient Air Temperature For Storage	-2570 °C
Relative Humidity	1095 %, without condensation (in operation)
	1095 %, without condensation (in operation)
Ip Degree Of Protection	IP20 with protective cover in place
Pollution Degree	2
Operating Altitude	02000 m
Storage Altitude	03000 m
Vibration Resistance	3.5 mm at 5…8.4 Hz on symmetrical rail
	3 gn at 8.4150 Hz on symmetrical rail
	3.5 mm at 58.4 Hz on panel mounting
	3 gn at 8.4150 Hz on panel mounting
Shock Resistance	15 gn for 11 ms

Packing Units

J		
Unit Type Of Package 1	PCE	
Number Of Units In Package 1	1	
Package 1 Height	10.511 cm	
Package 1 Width	11.725 cm	
Package 1 Length	17.063 cm	

Package 1 Weight	371.0 g
Unit Type Of Package 2	\$03
Number Of Units In Package 2	10
Package 2 Height	30 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	4.651 kg
Unit Type Of Package 3	P06
Number Of Units In Package 3	80
Package 3 Height	75.0 cm
Package 3 Width	40.0 cm
Package 3 Length	80.0 cm
Package 3 Weight	48 kg

Sustainability Screen Premium

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

Well-being performance

Mercury Free
Rohs Exemption Information Yes
Pvc Free


Certifications & Standards


Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information

Product datasheet

Dimensions Drawings

Dimensions







Product datasheet

Mounting and Clearance

Clearance

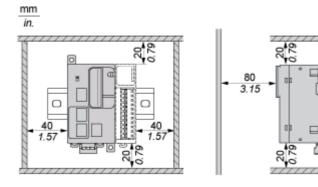


Mounting Position

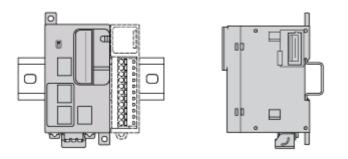


NOTE: Keep adequate spacing for proper ventilation and to maintain an ambient temperature between -10°C (14°F) and 55°C (131°F).

Acceptable Mounting




NOTE: Expansion modules must be mounted above the controller.

Incorrect Mounting

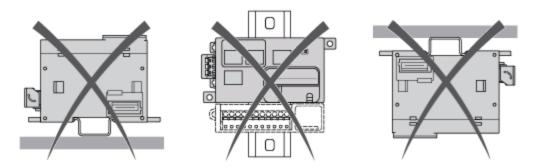

Direct Mounting on a Panel Surface

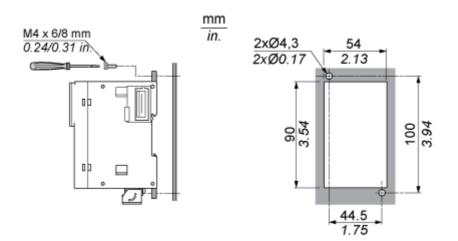

Connections and Schema

USB Connection to a PC



Ethernet Connection to a PC

