# **Product datasheet**

Specifications



# Harmony XB5, Flush mounting kit Ø30 for push buttons and pilot lights Ø22, plastic, 2-line legend

ZB5AZ025

### Main

Range Of Product	Harmony XB5
Product Or Component Type	Flush mounting kit
Accessory / Separate Part Category	Mounting and fixing accessory
Product Compatibility	XB7NL
	XB7EV
	XB5EV
	XB7ND
	XB7NG
	ZB5AA
	XB7NW
	XB7NJ
	ZB5AH
	ZB5AV
	ZB5AL
	XB7NA
Accessory / Separate Part Destination	Pilot light
	Push-button

## Complementary

Colour	Black
Ip Degree Of Protection	IP66 (front face) conforming to IEC 60529 IP69 (front face) conforming to IEC 60529 IP69K (front face) conforming to DIN 40050-9
Ik Degree Of Protection	IK03 conforming to IEC 50102
Mounting Diameter	30.5 mm
Quantity Per Set	Set of 1

### **Packing Units**

<b>U</b>	
Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	5.6 cm
Package 1 Width	4.3 cm
Package 1 Length	5.2 cm
Package 1 Weight	17 g
Unit Type Of Package 2	S02
Number Of Units In Package 2	80
Package 2 Height	15 cm
Package 2 Width	30 cm

40 cm

Package 2 Weight

1.66 kg

### **Sustainability**

**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >


Guide to assess a product's sustainability >

### Well-being performance

Reach Free Of Svhc	
V Toxic Heavy Metal Free	
Mercury Free	
Rohs Exemption Information	Yes
Reach Regulation	REACh Declaration
Eu Rohs Directive	Compliant
	EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

#### **Dimensions Drawings**

#### Dimensions with Flush Mounting Kit

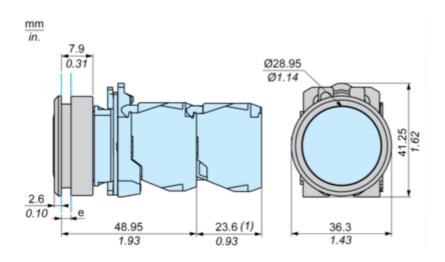

e : Clamping thickness : 1 to 3.5 mm / 0.04 to 0.14 in.(1) Additional row of contacts or double contact

# Product datasheet

Mounting and Clearance

#### Panel Cut-Out and Mounting

